

FLOAT SWITCHES

FSW-900 SERIES

DESCRIPTION

- The proven 900 Series MATElec Float Switch, which utilises an innovative, yet simple, fool proof switching concept, has greatly enhanced Float Switch reliability.
- The positive microswitching, eliminates the possibility of more than one circuit being in operation at any one time. The design innovation of the Switch is the 'sliding detent action' which obviates wave induced oscillation (common in mercury type switches) while maintaining consistency in switching level accuracy.
- The smooth robust ABS switch housing on the 9006, 9008 and the 9010 models prevents adhesion of foreign materials.


CONSTRUCTION/FEATURES

- Neoprene Rubber Cable
- ABS Housing Material
- Micro switch with NO/NC contacts
- Includes Cable weight
- Available in 2.5m, 10m and 20m lengths

APPLICATIONS

- Sewage & Stormwater pumps/Pumping Stations
- Rain Water/Water Saver Systems
- Waste Water Management
- Used To Control Pumps - When Liquid Level Changes

Model	Protection	Switching Capacity
FSW 9004	IP68 @ 20m	10A
FSW 9006	IP68 @ 20m	6A
FSW 9010	IP68 @ 20m	10A

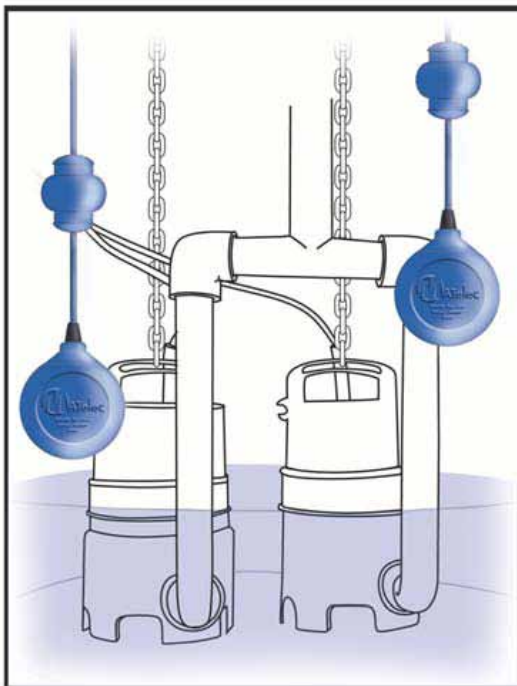

9004

9006

9010