

## SEWAGE & WASTEWATER PUMP STATIONS

### MAXI SERIES

#### DESCRIPTION

- Compact above-ground fully automatic dual pump stations designed for pumping sewage and wastewater for smaller sanitary applications in situations where gravity discharge is not feasible
- There are 4 different pump types available to suit different site conditions & applications

#### CONSTRUCTION/FEATURES

- Tough PE Holding tank - 500 Litre c/w dual sealed bolted PE lids (trafficable rated lid option available if required)
- Robust, Heavy duty sewage pumps - either Vortex (VX), Cutter (CR), or Grinder (GR) options available
- Lightweight - easily handled & installed by 1 man
- Space Saving - all below-ground installation
- Sealed Unit - No ground water infiltration or leakage
- Labour Saving - on site costs are minimal as all components are supplied including pipework, valves, control box, and HL Alarm
- 2 year pump warranty

#### APPLICATIONS


- Basement Ensuites/Bathrooms
- Granny Flats/Beach Houses/Baches
- Bathrooms/Laundries/Kitchen
- Lift Pits/Carparks
- Restaurants/Lunch Bars
- Commercial Kitchens
- Toilets, Showers, Washhand Basins, Vanity Units

**NB: We do not guarantee that these pumps will handle sanitary products**

**Refer to Technical Overview on pump types - page 46**

Model	Motor size	Voltage	Solids Passage	Outlet size
MAXI VX	0.75kW	230 V	35mm	50mm
MAXI CR	0.75kW	230 V	40mm	50mm
MAXI GR	1.0kW	230 V	N/A	32mm
MAXI GR PLUS	1.5kW	230 V	N/A	32mm

#### HYDRAULIC DATA

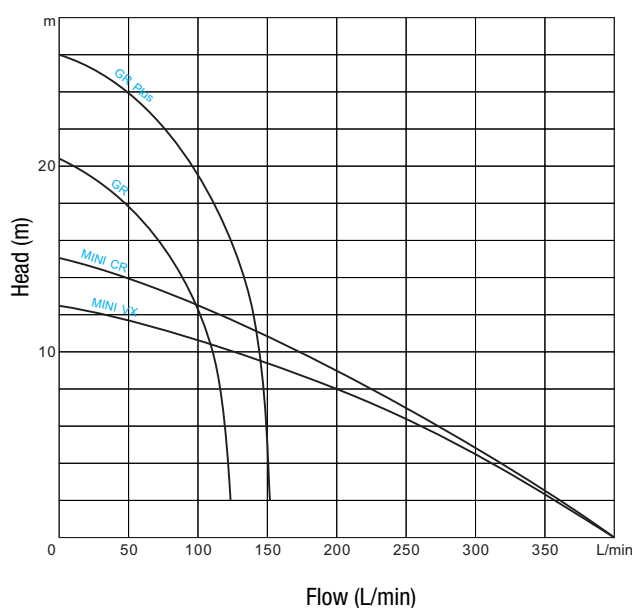

MAXI (DUAL)  
720 x 1270 x 770 H (500Ltrs max)